



New Products 2026 / 2027

Regulator rectifier **2**

Starter Relay **11**

Ignition Coil **17**

Starter Motor **19**

Motoplat Stator Assy **20**

DZE coming soon **27**

Motoplat coming soon **31**

REG 2598

Regulator

YAMAHA


Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
25 A	MONOFASIC	25 mm	67 mm	80 mm	60 mm	NO

SCR TECHNOLOGY



OEM

Yamaha
2GS-H1960-00
2GS-H1960-01
2GS-H1960-10



Applications

Yamaha
FZ 150 (2015 - 2018)
FZ Fi 160 (since 2014)
Tricity 300 (since 2020)
Tricity 125 (2017)
Tricity 150 (2016)
XMAX 300 (since 2017)
XTZ 150
YBR Fi 125 (since 2019)
YBR Fi 150 (since 2019)
YS 125 (2017 - 2020)

1. Battery (+) / Batería (+)
2. No Connection / Sin Conexión
3. GDN / Masa
4. Power Coil / Bobina de carga
5. Power Coil / Bobina de carga

REG 2615

Regulator

Kawasaki


Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
35 A	TRIFASIC	28 mm	80 mm	90 mm	68 mm	YES

SCR TECHNOLOGY



OEM

Kawasaki
21066-0016



Applications

Kawasaki
ZX-6R Ninja 600 (1997 - 1999)
ZX-6R Ninja 600 (2005 - 2006)
ZX-6R Ninja 636 (2005 - 2006)
ZX-6RR Ninja 600 (2005 - 2006)

1. Battery (+) / Batería (+)
2. GND / Masa
3. Ignition Switch / Sensor
4. AC output / Salida AC
5. Power Coil / Bobina de Carga
6. Power Coil / Bobina de Carga
7. Power Coil / Bobina de Carga

REG 2616

Regulator

Kawasaki

Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
35 A	TRIFASIC	28 mm	79 mm	90 mm	68 mm	YES

SCR TECHNOLOGY



OEM


Kawasaki
21066-1125
21066-0002

Applications

Kawasaki
ZX ZZ-R 600 (2005 - 2008)
ZX-6R Ninja 636 (2003 - 2004)
ZX-6R Ninja 600 (2000 - 2002)
ZX-6RR Ninja 600 (2003 - 2004)

Replacement

Shindengen SH650FA
Shindengen SH650-12



1. Batería (+) / Battery (+)
2. Ignition switch / Sensor
3. GDN / Sensor
4. AC Output / Salida AC
5. Power Coil / Bobina de carga
6. Power Coil / Bobina de carga
7. Power Coil / Bobina de carga

REG 2617

Regulator

SUZUKI

Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
25 A	TRIFASIC	29 mm	62 mm	85 mm	66 mm	NO

MOSFET TECHNOLOGY



OEM


Suzuki
32800-08D10

Applications

Suzuki
DF 125 (1999 - 2000)
DF 200 (1996 - 1999)
DR SE 200 (1995 - 2013)
DR SE 125 (1994 - 2001)
RG 125 (1992 - 1994)
TS 200 (1991 - 1993)

Replacement

Shindengen SH553B-13



1. Batería (+) / Battery (+)
2. Masa / GDN
3. Bobina de carga / Power Coil
4. Bobina de carga / Power Coil
5. Bobina de carga / Power Coil

REG 2620

Regulator

can-am


Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
25 A	TRIFASIC	38 mm	67 mm	95 mm	83 mm	NO

SCR TECHNOLOGY



OEM

Can Am
710000257



Applications

Can Am
DS 650 (2003 - 2007)
DS Baja 650 (2002 - 2005)

1. GND / Masa
2. Power Coil / Bobina de Carga
3. Battery (+) / Batería (+)
4. Power Coil / Bobina de Carga
5. Power Coil / Bobina de Carga

REG 2657

Regulator




Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
35 A	TRIFASIC	28 mm	80 mm	107 mm	75 mm	NO

MOSFET TECHNOLOGY



OEM

BMW
61148559626



Applications

BMW
G 310 R - 310 (2017 - 2021)
G 310 GS - 310 (2018 - 2021)

1. Battery (+) / Batería (+)
2. GND / Masa
3. Power Coil / Bobina de Carga
4. Power Coil / Bobina de Carga
5. Power Coil / Bobina de Carga

REG 2662

Regulator




Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
50 A	TRIFASIC	50 mm	107 mm	112 mm	82 mm	NO



OEM

Victory

4011959
4012238
4012239
4012717



Applications

Victory

Cross Country 1700 (2010 - 2017)
Cross Roads 1700 (2010 - 2014)
Hardball 1700 (2012 - 2013)
Magnum 1700 (2015 - 2017)
Vision 1700 (2008 - 2017)

1. Battery (+) / Bateria (+) (Red/ Rojo)
2. GND / Masa (Green/ Verde)
3. Power Coil / Bobina de Carga
4. Power Coil / Bobina de Carga
5. Power Coil / Bobina de Carga


SCR TECHNOLOGY

REG 2666

Regulator




Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
50 A	TRIFASIC	50 mm	107 mm	112 mm	82 mm	NO

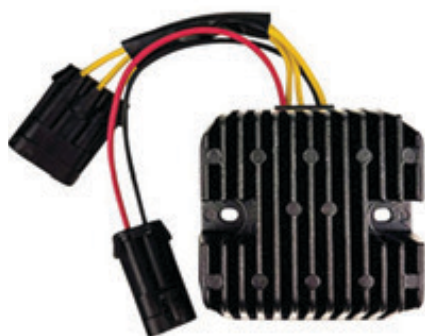

OEM

Victory

4012240
4012241
4012718
4011961



Applications

Victory

Boardwalk 1700 (2013 - 2015)
Gunner 1700 (2015 - 2017)
Hammer 1700 (2008 - 2017)
High Ball 1700 (2012 - 2017)
Jackpot 1700 (2008 - 2016)
Judge 1700 (2013 - 2017)
Kingpin 1700 (2008 - 2012)
Vegas 1700 (2008 - 2017)

1. Battery (+) / Bateria (+)
2. GND / Masa
3. Power Coil / Bobina de Carga
4. Power Coil / Bobina de Carga
5. Power Coil / Bobina de Carga

SCR TECHNOLOGY

REG 2667

Regulator



Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
50 A	TRIFASIC	50 mm	107 mm	112 mm	82 mm	NO

SCR TECHNOLOGY




OEM

Indian
4014300
4019661

Applications

Indian
Chief 1800 (2014 - 2020)
Chieftain 1800 (2014 - 2021)
Roadmaster 1800 (2015 - 2021)
Springfield 1800 (2016 - 2021)



1. Battery (+) / Bateria (+)
2. GND / Masa
3. Power Coil / Bobina de Carga
4. Power Coil / Bobina de Carga
5. Power Coil / Bobina de Carga

REG 2687

Regulator

aprilia



PIAGGIO

Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
25 A	TRIFASIC	29 mm	73 mm	82 mm	66 mm	NO

SCR TECHNOLOGY



OEM


Aprilia
1A017429
Piaggio
1A010780
1A0107805

Applications

Aprila
SR 150 (2018 - 2024)
SR 125 (2018 - 2024)
SR Motard 150 (2018 - 2024)
SXR 50 (2021 - 2025)
SXR 160 (2021 - 2025)

Vespa

LX E3-E4 125 (2017 - 2023)
Primavera E4-E5 50 (2016 - 2025)
Primavera E2-E4 125 (2016 - 2025)
Primavera iGet 150 (2016 - 2017)
Sprint 150 (2016)
Sprint iGet - E5 125 (2017 - 2025)



Piaggio
Liberty 50 (2017 - 2025)
Zip 4T 50 (2018 - 2024)

1. Battery (+) / Bateria (+)
2. ECU monitor / Control
3. GND / Masa
4. Power Coil / Bobina de Carga
5. Power Coil / Bobina de Carga
6. Power Coil / Bobina de Carga

REG 2690 Regulator

HONDA

Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
20 A	TRIFASIC	28 mm	54 mm	90 mm	72 mm	NO

SCR TECHNOLOGY



OEM


Honda
31600-KVC-D51

Applications

Honda
CB F 125 (2017 - 2020)
GLH Gaucha 150 (2021 - 2024)
NSC Elite 125 (2017 - 2023)
XR L 150 (2024)

Replacement

Pietcard 1541
Shindengen SH879AA



- 1. Battery (+) / Batería (+)
- 2. GND / Masa
- 3. Power Coil / Bobina de carga
- 4. Power Coil / Bobina de carga
- 5. Power Coil / Bobina de carga

REG 2694 Regulator

SUZUKI

Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
25 A	TRIFASIC	27 mm	80 mm	93 mm	74 mm	NO

MOSFET TECHNOLOGY




OEM

Suzuki
32800-21H00
32800-02H00

Applications

Suzuki
GSX R 1000 (2007 - 2008)
GSX R 600 (2006 - 2007)
GSX R 750 (2006 - 2007)



- 1. Battery (+) / Batería (+)
- 2. Battery (+) / Batería (+)
- 3. GND / Masa
- 4. GND / Masa
- 5. Power Coil / Bobina de Carga
- 6. Power Coil / Bobina de Carga
- 7. Power Coil / Bobina de Carga

REG 2697

Regulator

YAMAHA

Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
35 A	TRIFASIC	32 mm	81 mm	136 mm	33 mm	NO

MOSFET TECHNOLOGY




OEM

Indian

3JB-81960-00

3JB-81960-01




Applications

Indian

XV Virago 535 (1997)

XV Virago 535 (1998 a 2001)

XV Virago 500 (1998)



1. GND / Masa
2. Battery (+) / Batería (+)
3. Power Coil / Bobina de carga
4. Power Coil / Bobina de carga
5. Power Coil / Bobina de carga

REG 2698

Regulator

KOMATSU

YANMAR

Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
25 A	TRIFASIC	29 mm	73 mm	82 mm	66 mm	NO

SCR TECHNOLOGY



OEM


Komatsu

119653-77711

Yanmar

119653-77711

119653-77710



Applications

Komatsu

3D74E Engine

3D82 Engine

3D88E Engine

4D88E Engine

Yanmar

3TNE74 Engine

2TNV70 Engine

3TNE68 Engine

3TNV76 Engine

3TNV82A Engine

3TNE84 Engine

3TNV88 Engine



4TNE88 Engine

1. Power Coil / Bobina de Carga
2. GND / Masa
3. Power Coil / Bobina de Carga
4. Switched Positive when Charging
5. Ignition Switch / Sensor
6. Battery (+) / Batería (+)
7. Charge Lamp / Lámpara Piloto

REG 2699**Regulator****PIAGGIO**

Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
35 A	TRIFASIC	28 mm	66 mm	80 mm	67 mm	NO

MOSFET TECHNOLOGY**OEM**
Piaggio
58204R



Vespa
58204R
Applications**Piaggio**
Fly 125 (2012 - 2017)
Fly 150 (2012 - 2017)
Liberty 125 (2012 - 2014)
Vespa
GTS Superie 150 (2014 - 2017)
LT 125 / 150
LX 125 / 150 (2009 - 2014)
LXV 125 / 150 (2010 - 2016)
S 125 / 150 (2009 - 2017)


1. GND / Masa
2. Battery (+) / Batería (+)
3. Power Coil / Bobina de carga
4. Power Coil / Bobina de carga
5. Power Coil / Bobina de carga

REG 2719**Regulator****aprilia**

Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
35 A	TRIFASIC	41 mm	85 mm	109 mm	81 mm	NO

MOSFET TECHNOLOGY**OEM**
Aprilia
640698
58189R

Moto Guzzi
58189R
2D000043
Applications**Aprilia**
Dorsoduro 750 (2008 - 2016)
Dorsoduro 1200 (2011 - 2013)
Dorsoduro E4 900 (2017 - 2019)
Shiver 750 (2007 - 2016)
Shiver E4 900 (2017 - 2019)
Moto Guzzi
V7 Stone 750 (2012 - 2013)
V7 II Special 750 (2014 - 2016)
V7 II Racer 750 (2014 - 2016)
V7 II Stone 750 (2014 - 2016)
V7 Classic 750 (2008 - 2009)
V7 Cafe Classic 750 (2010 - 2013)
V7 Racer 750 (2012 - 2013)
V7 Special 750 (2012 - 2013)
V85 TT Euro5 850 (since 2019)
V9 Roamer 850 (since 2016)
V9 Bobber 850 (since 2016)


1. Battery (+) / Batería (+)
2. GND / Masa
3. Battery (+) / Batería (+)
4. GND / Masa
5. Power Coil / Bobina de carga
6. Power Coil / Bobina de carga
7. Power Coil / Bobina de carga

Replacement

Shindengen SH744AB



REG 2723

Regulator

Current (corriente)	Input type (tipo de entrada)	Height (alto)	Width (ancho)	Length (largo)	Pitch (entre centro)	With sensor (con sensor)
50 A	TRIFASIC	43 mm	120 mm	110 mm	100 mm	NO

MOSFET TECHNOLOGY





OEM

CF Moto
0800-177000-30000

Applications

CF Moto
CForce 1000 / 800 / 400
UForce 1000
ZForce 950 / 800 / 500



1. Power Coil / Bobina de carga
2. Power Coil / Bobina de carga
3. Power Coil / Bobina de carga
4. Battery (+) / Batería (+)
5. GND / Masa

RAR 10556

Starter Relay

TRIUMPH

SUZUKI



Voltage (tensión)	Current (corriente)	Fuse (fusible)
12 V	150 A	30 A

OEM

Suzuki
31800-35F00

Triumph
T1310120

Applications


Suzuki

GSX R 1000 (2001 - 2004)
GSX R 600 (2001 - 2005)
GSX R 750 (2000 - 2005)

Triumph

Bonneville T100 1000 (2017 - 2024)
Bonneville T120 1200 (2016 - 2024)
Daytona 660 (2024)
Daytona 675 (2006 - 2017)
Scrambler 900 (2017 - 2024)
Speed Twin 900 (2016 - 2024)
Sprint ST 1050 (2005 - 2012)
Sprint GT 1050 (2011 - 2020)
Street Triple 675 (2006 - 2017)

Street Cup 900 (2017 - 2020)
Street Twin 900 (2016 - 2024)
Thruxton R 1200 (2016 - 2024)
Thruxton RS 1200 (2016 - 2024)
Tiger GT 900 (2020 - 2024)
Tiger Pro 900 (2020 - 2024)
Tiger Bond 900 (2020 - 2024)
Tiger Sport 850 (2021 - 2024)
Tiger Standard 1050 (2007 - 2012)
Tiger SE 1050 (2007 - 2012)
Tiger Sport 1050 (2013 - 2020)
Tiger Sport 660 (2022 - 2024)
Tiger XC / XR 800 (2011 - 2020)
Tiger Rally 900 (2020 - 2024)
Trident 660 (2021 - 2024)

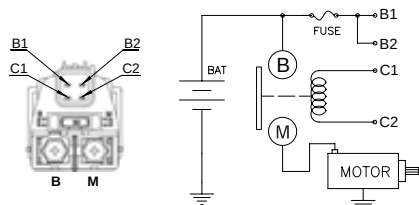

RAR 10557

Starter Relay

DUCATI

SUZUKI



Voltage (tensión)	Current (corriente)	Fuse (fusible)
12 V	150 A	30 A

OEM

Ducati
39740071A

Suzuki
31800-38G00
31800-38G10


Applications

Ducati

Diavel Gen 1 1200 (2011 - 2018)
Multistrada 1200 (2010 - 2014)
Panigale 1299 (2012 - 2018)
Panigale 959 (2012 - 2018)
Panigale 1199 (2012 - 2018)
Panigale 899 (2012 - 2018)
StreetFighter 1100 (2010 - 2015)
XDiavel 1158 (2011 - 2018)

Suzuki

GSF Bandit 650 (2007 - 2012)
GSF Bandit 1200 (2006)
GSF Bandit 1250 (2007 - 2011)
Suzuki GSX S 1000 (2017)
GSX 1250 (2010 - 2011)
GSX F 650 (2008 - 2011)
VZR Intruder 1800 (2006 - 2012)
VZR Boulevard 1800 (2006 - 2017)

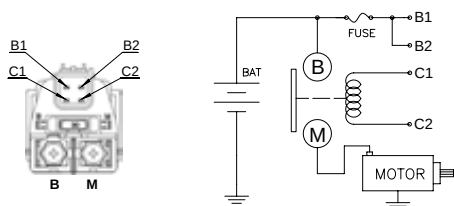

RAR 10558

Starter Relay

YAMAHA



Voltage (tensión)	Current (corriente)
12 V	150 A

OEM

Yamaha
4BP-81940-00

Applications

Yamaha
XJ SECA 600 (1992 - 1998)
XJ Diversion 400 (1992 - 1993)
XJ Diversion 600 (1992 - 2002)

RAR 10560

Starter Relay

YAMAHA



Voltage (tensión)	Current (corriente)
12 V	150 A

OEM

Yamaha
4KD-81940-00
3AY-81940-00

Applications

Yamaha

YFA Breeze 125 (1989 - 1996)	YFM Kodiak 400 (1993 - 1995)
YFA Breeze 125 (1997 - 2003)	YFM Moto-4 200 (1985 - 1989)
YFB Timberwolf 250 (1992 - 1996)	YFM Moto-4 225 (1986 - 1988)
YFB Timberwolf 250 (1997 - 2001)	YFM Moto-4 350 (1987 - 1995)
YFM Moto-4 250 (1989 - 1991)	YFM Badger 80 (1985 - 1988)
YFM Moto-4 200 (1989 - 1990)	YFM Badger 80 (1999 - 2002)
YFM Moto-4 350 (1989 - 1994)	YFM Big Bear 350 (1987 - 1989)
YFM Moto-4 80 (1988)	YFM Champ 100 (1987 - 1989)
YFM Badger 80 (1993 - 1998)	YFM Raptor 80 (2002 - 2003)
YFM Big Bear 350 (1990 - 1996)	YFM Warrior 350 (1987 - 2003)
YFM Champ 100 (1989 - 1992)	YTM Tri-Moto 200 (1983 - 1986)

RAR 10562

Starter Relay

can-am



Voltage (tensión)	Current (corriente)
12 V	150 A

OEM

Bombardier

710-000-111

710-000-252

515-176-011

Can-Am

710-007-777

710-001-364

Applications

Bombardier

DS 650 (2000 - 2006)

Quest 2x4 / 4x4 / XT 500 (2002)

Rally 175 (2003 - 2004)

Can-Am

Commander 1000 (2012 - 2019)

Comm. Max 1000 (2014 - 2019)

Commander 800 (2011 - 2015)

DS 650 (2007)

DS 90 / 250 / 450 (2008 - 2015)

DS 70 (2008 - 2019)

DS X 650 (2007)

Maverick Max1000 (2014 - 2019)

Maverick 1000 (2013 - 2019)

Outlander R 800 (2009 - 2015)

Outlander 650 (2008 - 2015)

OutlanderMax1000 (2008 - 2015)

Outlander 1000 (2012 - 2015)

Outlander 400 (2008 - 2015)

Outlander 500 (2008 - 2015)

Renegade EFI 800 (2007)

Renegade 500 (2008 - 2015)

Renegade 800 (2009 - 2015)

Spyder GS 990 (2008 - 2009)

Spyder RS 1000 (2010 - 2015)

Replacements

Denso 182800-4050 / 182800-2280 / 182800-4051 / 182800-3760

RAR 10563

Starter Relay

SUZUKI



Voltage (tensión)	Current (corriente)	Fuse (fusible)
12 V	150 A	30 A

OEM

Suzuki

31800-41G00

31800-41G10

Applications

Suzuki

GSX 1300 (2008 - 2010)


GSX R 600 (2006 - 2010)

GSX R750 (2006 - 2010)

GSX R 1000 (2005 - 2016)

SFV Gladius 650 (2009 - 2011)

SFV Gladius 650 (2015)

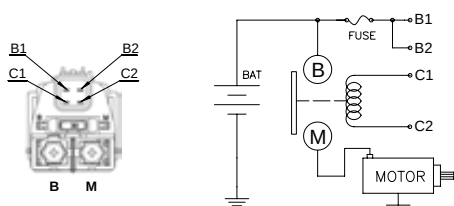

RAR 10564

Starter Relay



Voltage (tensión)	Current (corriente)	Fuse (fusible)
12 V	150 A	30 A

OEM

Suzuki

31800-41G00

31800-41G10

Applications


Suzuki

LT-A KingQuad 450 (2007 - 2010)

LT-A KingQuad 700 (2006 - 2007)

LT-A KingQuad 750 (2008 - 2017)

LT-A KingQuad 500 (2009 - 2017)

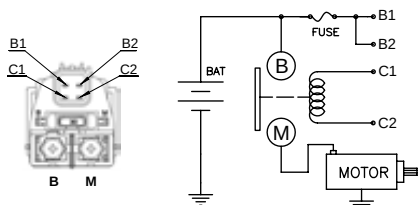

RAR 10565

Starter Relay



Voltage (tensión)	Current (corriente)	Fuse (fusible)
12 V	150 A	30 A

OEM

Suzuki

31800-26E00

31800-13E00

31800-44G00

Triumph

T1310115

Applications

Suzuki

DR SE 650 (1996 - 2017)

DR 250 (1998 - 2000)

DR-Z 250 (2001 - 2009)

GSF Bandit 600 (1995 - 2004)

GSF Bandit 1200 (1998 - 2005)

GSX R 600 (1997 - 2000)

GSX R 750 (1996 - 1999)

GSX 1400 (2002 - 2007)

GSX R Hayabusa 1300 (2008 - 2017)

GSX R Hayabusa 1300 (1999 - 2007)

XF Freewind 650 (1997 - 2001)

Triumph

Daytona 600 (2002 - 2005)

DaytonaR 675 (2006 - 2020)


Daytona 650 (2002 - 2005)

SprintGT 1050 (2010 - 2020)

StreetTriple 675 (2007 - 2018)


StreetTriple 765 (2019 - 2020)

TigerSport 1050 (2013 - 2020)



RAR 10566

Starter Relay

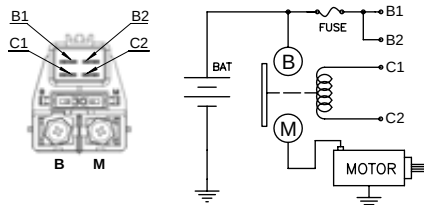

Voltage (tensión)	Current (corriente)	Fuse (fusible)
12 V	150 A	30 A

OEM

Kawasaki
27010-S024

Suzuki
31800-35F00
31800-07G00


Applications

Kawasaki
KSF 400 (2003 - 2006)

Suzuki
LT-A KingQuad 700 (2005 - 2007)
LT-Z QuadSport 400 (2003 - 2008)

RAR 10567

Starter Relay

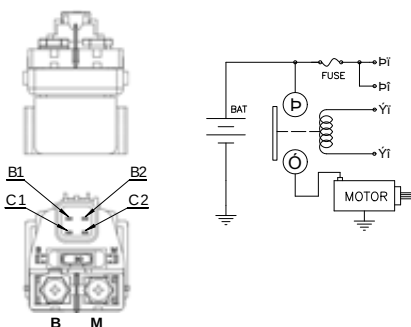

Voltage (tensión)	Current (corriente)	Fuse (fusible)
12 V	150 A	30 A

OEM

Suzuki
31800-38G10
31800-33H00



Applications

Suzuki
LT-A FL400 2012
LT-A KingQuad 400 (2008 - 2017)
LT-F KingQuad 400 (2008 - 2016)
LT-Z400 (2009 - 2013)



RAR 10568

Starter Relay



Voltage (tensión)	Current (corriente)	Fuse (fusible)
12 V	150 A	30 A

OEM

Arctic Cat
3530-001

Suzuki
31800-26E00

Applications

Arctic Cat

ATV 454 (1997 - 1998)
ATV 375 (2002)
ATV 500 (1998 - 2003)
ATV 400 (1998 - 2005)
Bearcat 454 (1996)
TBX 500 (2002 - 2003)
TRV 500 (2003)

Suzuki

LT AQuad Master 500 (2000 - 2001)
LT - FQuad Runner 500 (1998 - 2002)

RAR 10570

Starter Relay

YAMAHA



Voltage (tensión)	Current (corriente)
12 V	150 A

OEM

Yamaha
5MJ-H1940-01
3AY-81940-00
3SX-81940-00
4KD-81940-00

Applications

Yamaha

BW Big Wheel 200 (1986 - 1988)
BW Big Wheel 350 (1987 - 1988)
DT R/E 125 (1989 - 1999)
FJ600 (1984 - 1985 / 1989 - 1990)
SR185 (1981 - 1982)
SR250 (1996 - 2000 / 1990 - 1991)
SR125 (1989 - 1997)
SRX600 (1991) / 250 (1987)
SRX 400 (1991)
SZ-R 660 (1995 - 1997)
T50 / T80 (1993)
T50 / T 80 (1985)
TDR 125 (1991 - 1992)
TT600 (1994 - 1998)
TT-R225 (1999 - 2004)
TT-RR250 (1992 - 2004)
TT-R250 (1999 - 2006)
TW Trailway 200 (1987 - 2000)
TW Trailway 200 (1997)
XC Cygnus 125 (2000 - 2001)
XJ 550 (1981 - 1982)
XJ Diversion 600 (1989 - 1991)

XJ 650 (1980 - 1983)
XJ Diversion 900 (1989 - 1991)
XJ 750 (1981 - 1983)
XJ 400 (2001)
XJ 1100 (1982)
XS 1100 (1981)
XS 850 (1981)
XT 600 (1989 - 1998)
XT 500 (1989 - 1996)
XT Artesia 400 (1991 - 1992)
XT 225 (1992 - 2000)
XT Serow 225 (1989 - 2000)
XTZ Tenere 660 (1991 - 1996)
XTZ Super Tenere 750 (1989 - 1995)
XV Virago 535 (1987 - 2001)
XV Virago 500 (1995 - 1998)
XV Virago 400 (1991 - 1994)
XV Virago 250 (1991)
XV Virago 500 (1983)
XV 920 (1981 - 1982)
XVZ Venture Royale 1200 (1983-1985)
YX Radian 600 (1986 - 1991)
XF Freewind 650 (1997 - 2001)

BSE 12810

Ignition Coil



Benelli



Outputs (salidas)	Terminals (terminales)	Voltage (tensión)
1	3	12 V

OEM

Benelli
96200P300000

Keeway
96200P300000

Applications

Benelli

BN 302 300
BN 600 GT 600
TNT 249 S 250
TNT 600 600
TNT 300 300

Keeway

RK 600 600
RKX 300 300

BSE 12829

Ignition Coil

HONDA



Outputs (salidas)	Terminals (terminales)	Voltage (tensión)	Primary resistance (Resistencia primario)
1	2	12 V	1.25 [0hm]

OEM

Honda
30700-MBW-611

Applications

Honda

CBR F4i 600 (2001 - 2006)
CBR RR / RE 929 (2001)
CBR F4 600 (1999 - 2000)
CBR RR 954 (2002 - 2003)

BSE 12854

Ignition Coil



Outputs (salidas)	Terminals (terminales)	Voltage (tensión)	Primary resistance (Resistencia primario)
1	2	12 V	1.6 [0hm]

OEM

Suzuki
33410-38H00

Applications

Suzuki

GSX R 750 (2008 - 2025)

BSE 12855

Ignition Coil

HONDA



Outputs (salidas)	Terminals (terminales)	Voltage (tensión)	Primary resistance (Resistencia primario)
1	2	12 V	1.6 [Ohm]

OEM

Honda
30700-MFL-003

Applications

Honda
CBR RR 1000 (2008 - 2024)
CBR S 1000 (2014 - 2019)
CBR RA 1000 (2009 - 2019)

BSE 12878

Ignition Coil

CFMOTO



Outputs (salidas)	Terminals (terminales)	Voltage (tensión)
1	2	12 V

OEM

CF Moto
0700-178000-10000
0700-178000

Morini
0700-178000

Applications

CF Moto
400 NK 400
400 GT 400
650 MT 650
650 NK 650
650 TR 650
700 CLX 700

Morini
X-CAPE 650



MOA 10561

Starter motor



Voltage (tensión)	Gear teeth (dientes)	Gear diameter (diámetro engranaje)	Spin (sentido de giro)
12 V	9	14 mm	Right (derecha)

OEM

CF Moto
196S-091100
0600-091100

Applications

CF Moto
CForce X6 600
CForce 500
CForce 600
Rancher 600
Rancher 500
ZForce Z6 Snyder 600
ZForce Z6 Sport 600
ZForce EX Sport 600

EST 13000

Stator Assy

HONDA



Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	With sensor (con sensor)	Poles (polos)
12 V	115 mm	42 mm	NO	18

OEM


Honda

31120-MEL-D21
31120-MEL-013
31100-MEL-305
31120-MEL-D22


Applications

Honda

CBR RR 1000 (2004 - 2007)



1 - 2 - 3: AC Power Output / Salidas CA



EST 13003

Stator Assy

HONDA



Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	With sensor (con sensor)	Poles (polos)
12 V	115 mm	54 mm	NO	18

OEM

Honda

31120-MCJ-751
31120-MCJ-003


Applications

Honda

CBR 900 RR Fireblaze 900 (2000 - 2001)
CBR 900 RR Fireblaze 900 (2002 - 2003)



1 - 2 - 3: AC Power Output / Salidas CA



EST 13005

Stator Assy

HONDA




Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	With sensor (Con sensor)	Poles (polos)
12 V	115 mm	42 mm	NO	18

OEM


Honda
31120-MFA-D01
1120-MGJ-D01
31120-MGJ-D02
1120-MFA-D02

Applications

Honda
CBF 1000 (2006 - 2009)
CBF 1000 (2010 - 2012)



1 - 2 - 3: AC Power Output / Salidas CA

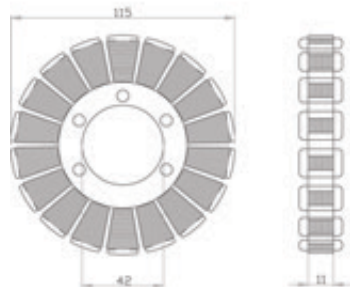

EST 13007

Stator Assy

HONDA



Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	Poles (polos)
12 V	104 mm	42 mm	18

OEM


Honda
T1300502
T1300350

Applications

Honda
Speed Triple 1050 (1994-2014)
Speed Triple 955 (1999 - 2004)
Speed Triple 885 (1994 - 1996)
Sprint RS (1999 - 2004)
Sprint ST (1999 - 2014)
Tiger 955i (2001 - 2007)
Tiger 885i (1993 - 1998)
Daytona 595 (1997 - 2006)
Trophy 900 (1991-2004)



1 - 2 - 3: AC Power Output / Salidas CA



EST 13011

Stator Assy

HONDA



Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	Poles (polos)
12 V	115 mm	54 mm	18

OEM


Honda

31120-MM8-881
31120-MM8-005
31120-MAA-005
31120-MAH-005
31120-MCK-000


Applications

Honda

VT1100C Shadow (1987-1997)
VT1100C2 Shadow ACE (1995-1999)
VT1100C Shadow Spirit (1998-2005)
VT1100C3 Shadow Aero (1998-2002)
VT1100C2 Shadow Sabre (2000-2007)



1 - 2 - 3: AC Power Output / Salidas CA



EST 13012

Stator Assy

Kawasaki



Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	Poles (polos)
12 V	102 mm	38 mm	18

OEM

Kawasaki

21003-1118


Applications

Kawasaki

VN750 Vulcan (1986-2006)



1 - 2 - 3: AC Power Output / Salidas CA



EST 13016

Stator Assy

YAMAHA



Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	With sensor (Con sensor)	Poles (polos)
12 V	105.5 mm	38 mm	xx0	xx

OEM


Yamaha
5SL-81410-00-00

Applications

Yamaha
YZF-R6 600 (2003-2005)
YZF-R6S 600 (2006-2009)



1 - 2 - 3: AC Power Output / Salidas CA



EST 13020

Stator Assy

aprilia



Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	With sensor (Con sensor)	Poles (polos)
12 V	115 mm	54 mm	NO	18

OEM


Aprilia
AP0295830

Applications

Aprilia
RSV 1000 / Mille R (1999 - 2003)
RSV Tuono (2002 - 2005)
SL 1000 Falco R (1999 - 2004)



1 - 2 - 3: AC Power Output / Salidas CA
4 - 5: Pulser Coil / Captor

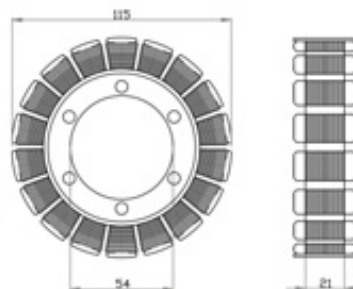

EST 13023

Stator Assy

YAMAHA



Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	With sensor (con sensor)	Poles (polos)
12 V	84.5 mm	31 mm	YES	12

OEM

Yamaha

5TG-81410-00-00
5TG-81410-01-00
5TG-81410-02-00
5TG-81410-03-00

Applications

Yamaha

YFZ Carburetor 450 (2004 - 2009)

GROUNDING STATOR

EST 13024

Stator Assy

YAMAHA



Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	With sensor (con sensor)	Poles (polos)
12 V	97 mm	37 mm	YES	18

OEM

Yamaha

18P-81410-00-00

Applications

Yamaha

YFZ X 450 (2010 - 2011)
YFZ R 450 (since 2009)

EST 13027

Stator Assy

HONDA

DECEMBER 2026



Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	With sensor (con sensor)	Poles (polos)
12 V	107.1 mm	42 mm	NO	18

OEM

Honda

31120-MW0-004

Applications

Honda

CBR 900 RR Fireblade (1992 - 1995)

EST 13037

Stator Assy

DECEMBER 2026



Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	With sensor (con sensor)	Poles (polos)
12 V	118.4 mm	54.2 mm	YES	18

OEM

Suzuki

32101-06G10
32101-06G11

Applications

Suzuki

VSTROM DL1000 (2002 - 2012)



EST 13052

Stator Assy

DECEMBER 2026



Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	With sensor (con sensor)	Poles (polos)
12 V	61 mm	27.6 mm	YES	8

OEM

Honda

31120-KRN-670
31120-MEN-730
31120-MEN-731
31120-MEN-A10
31120-MEN-A11

Applications

Honda

CRF250R (2004 - 2009)



EST 13057

Stator Assy

DECEMBER 2026



Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	With sensor (con sensor)	Poles (polos)
12 V	94.5 mm	35.1 mm	NO	18

OEM

Honda

31120-KTF-640

Applications

Honda

PES125 / PS125 (2007 - 2009)
PES125 / PS150 (2007 - 2009)
SH125 (2009)
SH150 (2009 - 2010)
S-Wing 125 (2009)



EST 13092

Stator Assy

Kawasaki



Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	With sensor (con sensor)	Poles (polos)
12 V	104 mm	42 mm	NO	18

OEM

Kawasaki
21003-0042
21003-0041

Applications

Kawasaki
ER ER-6N 650 (2006 - 2008)
ER ER-6N ABS 650 (2006 - 2011)
EX Ninja 650 (2006 - 2011)
EX Ninja R 400 (2011 - 2013)
KLE VERSYS 650 (2007 - 2014)
KLE VERSYS 650 (2007 - 2014)

EST 13093

Stator Assy

Kawasaki



Voltage (tensión)	Outer diameter (diámetro externo)	Inner diameter (diámetro interno)	With sensor (con sensor)	Poles (polos)
12 V	104 mm	42 mm	NO	18

OEM

Kawasaki
21003-0164
21003-0118
21003-0206

Applications

Kawasaki
EN Vulcan S 650 (2015 - 2017)
EN Vulcan S ABS 650 (2015 - 2017)
EN Vulcan S ABS SE 650 (2015 - 2017)
ER ER-6N 650 (2012 - 2014)
ER ER-6N ABS 650 (2012 - 2014)
ER Z ABS 650 (2017 - 2018)
ER ER-6N 650 (2012 - 2016)
ER ER-6N ABS 650 (2012 - 2016)
EX Ninja R 400 (2014 - 2015)
EX Ninja R ABS 400 (2014 - 2015)
EX Ninja 650 (2012 - 2016)
EX Ninja ABS 650 (2012 - 2016)
EX Ninja R 400 (2016 - 2017)
EX Ninja R ABS 400 (2016 a 2017)
EX Ninja 650 (2012 - 2018)
EX Ninja ABS 650 (2012 - 2018)
EX ER-6F 650 (2012 - 2016)
EX ER-6F ABS 650 (2012 - 2016)
KLE VERSYS 650 (since 2014)



Coming Soon 2027

*Regulator Rectifier
Relay*

can-am

REG 2732

Regulator

OEM	Brand - model		Year
710005568	Outlander	500	form 2010 to 2015
710001191	Outlander	650	form 2010 to 2015
	Outlander	800	form 2010 to 2015
	Commander	800 / 800R	from 2011 to 2017
	Commander	1000	from 2011 to 2017
	Renegade	800R	from 2012 to 2015
	Renegade	1000R	from 2012 to 2015
	Maverick	1000R	from 2013 to 2017
	Defender	HD8	from 2016 to 2017
	Defender	HD10	from 2016 to 2017

HONDA

REG 2584

Regulator

OEM	Brand - model		Year
31600-MCR-A01	VT750DC Spirit		from 2001 to 2007

REG 2629

Regulator

31600-MFG-D01	CB600F Hornet		from 2007 to 2013
	CBF600 Naked		from 2008 to 2010
	CB1000R / ABS		from 2008 to 2016
	CBR1000RA Fireblade		from 2013 to 2014
	Forza 250		from 2008 to 2014
	Forza 300		from 2008 to 2014

REG 2731

Regulator

31600-KVZ-631	CBR1000RR Fireblade		form 2008 to 2011
	NSA700		from 2008 to 2009
	NSS250		from 2008 to 2010
	CBF1000F		from 2010 to 2011

RAR 10569

Starter Relay

35850-KL8-740	NX500 Dominator		from 1995 to 1999
	NX650 Dominator		from 1995 to 1999
	XL250		from 1991 to 1995
	XR230		from 2005 to 2009
	XR250		from 1995 to 2007



	OEM	Brand - model		Year
REG 2710 / Regulator	60311034000	Adventure R	1090	2017
		Adventure	1190	from 2014 to 2016
		Adventure	1290	from 2014 to 2020
		Super Duke	1290	from 2014 to 2020
		Duke	790	from 2019 to 2020
		Adventure	790	from 2019 to 2020
REG 2716 / Regulator	58411034100	EGS-E	400	1997
		RXC-E	400	from 1997 to 1998
		LC4	400	from 1998 to 2001
		DUKE	620	from 1996 to 1997
		EGS / RXC	620	1997
		LC-4	620	from 1998 to 1999
		SMC	625	from 2004 to 2006
		SXC	625	from 2003 to 2005
		Adventure	640	from 2005 to 2007
		Adventure-R	640	from 1998 to 2001
		LC4	640	from 1998 to 2005
		Rally	660	from 2005 to 2007



	OEM	Brand - model		Year
REG 2729 / Regulator	4016868	RZR	900	from 2015 to 2022
		RZR	1000	from 2014 to 2022
		RZR XP Turbo		from 2016 to 2021
		RZR PRO XP		from 2021 to 2022
		General	1000	from 2016 to 2022
		Ranger	570	from 2018 to 2022
		Ranger XP		from 2017 to 2024
		Sportsman	850	from 2017 to 2024
		Scrambler	850	from 2017 to 2024
RAR 10575 / Starter Relay	453488	Outlaw	50	from 2007 to 2019
		Outlaw	90	from 2007 to 2016
		Outlaw	110	from 2016 to 2026
		Sportsman	90	from 2007 to 2016
		Sportsman	110	from 2016 to 2026



RAR 10572 Starter Relay

OEM	Brand - model		Year
31800-37020	GN	125	from 1982 to 1983
31800-37021	GS	125	from 1982 to 1994
	GN	250	from 1982 to 1994
	GS	250T	from 1980 to 1981
	GS	450	from 1980 to 1983
	GS	500	from 1977 to 1983
	GS	750	from 1977 to 1983
	GS	850	from 1979 to 1986
	GS	1000	from 1978 to 1981

YAMAHA

REG 2724 Regulator

OEM	Brand - model		Year
B7B-81960-00	WR	250F	from 2020 to 2022
	YZ	250F	from 2019 to 2022
	WR	450F	from 2019 to 2022
	YZ	450F	from 2020 to 2022

REG 2730 Regulator

B97-H1960-00	YZF-R15	from 2020 to 2021
	FZ25	from 2019 to 2025



Coming Soon 2027

Stator Assy

**EST 13034****Stator****OEM****Brand - model****Year**

12117687776

F 650 CS

from 2002 to 2005

12117652964

F 650 GS / Dakar

from 2000 to 2004

F 650 GS / Dakar

from 2005 to 2007

**EST 13071****Stator****OEM****Brand - model****Year**

30017-08

FLS Slim

2017

30017-08A

EST 13074**Stator**

29987-06D

Street Glide / Road King / FLH / FLT

from 2006 to 2016

HONDA

EST 13035**Stator****OEM****Brand - model****Year**

31120-MW2-781

XR

650L

from 1993 to 2018

NX

650 Dominator

from 1990 to 1999

NX

500 Dominator

from 1990 to 1999

EST 13042**Stator**

31120-MAV-003

VT

600 Shadow

from 1988 to 1998

31120-MR1-004

Kawasaki

EST 13039**Stator****OEM****Brand - model****Year**

21003-0010

ZX-12R Ninja

1200

from 2000 to 2001

21003-1351

**EST 13096****Stator****OEM****Brand - model****Year**

A44039404000

SX / XC 250

from 2023 to 2025

SX / XC 300

from 2023 to 2025

EST 13097**Stator**

79239004100

SX-F 250

from 2015 to 2025

79239004000

SX-F 350

from 2015 to 2025

SX-F 450

from 2015 to 2025

XC-F 250

from 2015 to 2025

XC-F 350

from 2015 to 2025

XC-F 450

from 2015 to 2025

Replacement:

79239004200

**EST 13096****Stator****OEM****Brand - model****Year**

A44039404000

TC 250

from 2023 to 2025

TX 300

from 2023 to 2025

MC 250

from 2024 to 2025

MC 300

from 2024 to 2025

EST 13097**Stator**

79239004100

FC 250

from 2014 to 2025

79239004000

FC 350

from 2014 to 2025

FX 350

from 2014 to 2025

FC 450

from 2014 to 2025

FX 450

from 2014 to 2025

Replacement:

79239004200

**EST 13096****Stator****OEM****Brand - model****Year**

A44039404000

EX 250

from 2024 to 2025

EX 300

from 2024 to 2025

EST 13097**Stator**

79239004100

EX 250F

from 2021 to 2025

79239004000

EX 350F

from 2021 to 2025

EX 450F

from 2021 to 2025

MC 250F

from 2021 to 2025

MC 350F

from 2021 to 2025

MC 450F

from 2021 to 2025

Replacement:

79239004200



COMING SOON 2027



EST 13051

Stator

OEM	Brand - model	Year
31120-LBA7-90A	ATV MXU Mongoose 250	from 2006 to 2020



EST 13029

Stator

OEM	Brand - model	Year
30899063089959	ATVs	
	Sportsman 500 EFI / HO EFI	from 2007 to 2009
	Sportsman 500 EFI Tractor	2010
	Sportsman Touring 500 EFI	2008
	Sportsman Touring 500 EFI	2009
	Sportsman X2 500 EFI	2007
	Sportsman X2 500 EFI	from 2008 to 2009
	Sportsman 500 EFI / HO EFI	from 2007 to 2009
	Sportsman 500 EFI Tractor	2010
	Sportsman Touring 500 EFI	2008
	Sportsman Touring 500 EFI	2009
	Sportsman X2 500 EFI	2007
	Sportsman X2 500 EFI	from 2008 to 2009
	UTVs	
	Polaris Ranger 4x4 500 EFI	from 2006 to 2007
	Polaris Ranger 4x4 500 EFI	from 2008 to 2009
	Polaris Ranger 4x4 500 EFI	2010



EST 13032

Stator

OEM	Brand - model	Year
32101-10F00	VL1500 Intruder	from 1998 to 2004
32101-10F01		

EST 13040

Stator

32101-38A00	VS700 Intruder	from 1986 to 1987
32101-38A10	VS750 Intruder	from 1988 to 1991
	VS800 Intruder	from 1992 to 1997

TRIUMPH

EST 13018**Stator**

OEM	Brand - model		Year
T1300111	Sprint ST	1050	from 2005 to 2010
	Sprint ST ABS	1050	from 2006 to 2009
	Sprint ABS	1050	2010
	Tiger	1050	from 2007 to 2011
	Tiger	1050 ABS	from 2007 to 2011
	Tiger	1050 SE	2010

EST 13019**Stator**

T1300510	Daytona	955	from 2001 to 2003
T1300507	Daytona Centenary Special	955	2002
	Daytona	955i	from 2004 to 2006

YAMAHA

EST 13046**Stator**

OEM	Brand - model		Year
26H-81410-10	VMX 1200 V-Max		from 1985 to 2007
26H-81410-11			
26H-81410-12			
3JJ-81410-00			
3UF-81410-00			
3UF-81410-10			

EST 13048**Stator**

2C0-81410-00	YZF-R6	from 2006 to 2020
--------------	--------	-------------------



NOTAS

A series of horizontal dotted lines for taking notes.